


Cella Fredda 8000 - 15000 B/H


Cold glue labelling machines 8000 - 15000 B/H



La solida stazione PF, diventa PF3 quando le palette di etichettatura sono in numero di 3. La produttività raggiunta è di 11.000 pezzi/h. Un nuovo tipo di stazione denominato PFM è stato studiato per applicare etichette avvolgenti fino a 8.000 pezzi/h e può raggiungere, con etichette parziali, i 15.000 pezzi /h.




PF3 9T



TYPE	Cold glue
SPEED	9000 c/h
PLATES / HEADS	9
CONTAINER SELECTION	Screw conveyor
PLATES ROTATION	Oil bath cam
MAX. NUMBER OF STATIONS	2C+1A
SPEED GEARS	Inverter
SERIE'S EQUIPMENT	Preselection gate - Glue pump - Auto speed adj. - No bottle-no glue - Smoothing device - Too full sensor
SPACES IN STAR	n.d.
PRIMITIVE DIAMETER	600 mm
MAX. LABEL LENGHT	120 mm
MAX. LABEL HEIGHT	n.d.
CONTAINERS DIAMETER	50-120 mm
CONTAINER HEIGHT	380 mm
MACHINE MEASURES	300x180 cm
CASE MEASURES	325x205 cm
WEIGHT	2600 kg
VOLTAGE	380V 60Hz
ELECTRICAL CONSUMPTION	3,34kw

KOLMAR 1005

PF3 15T




TYPE	Cold glue
SPEED	11000 c/h
PLATES / HEADS	15
CONTAINER SELECTION	Screw conveyor
PLATES ROTATION	Oil bath cam
MAX. NUMBER OF STATIONS	3C+1A
SPEED GEARS	Inverter
SERIE'S EQUIPMENT	Preselection gate - Glue pump - Auto speed adj. - No bottle-no glue - Smoothing device - Too full sensor
SPACES IN STAR	6
PRIMITIVE DIAMETER	1000 mm
MAX. LABEL LENGHT	120 mm
MAX. LABEL HEIGHT	n.d.
CONTAINERS DIAMETER	50-120 mm
CONTAINER HEIGHT	380 mm
MACHINE MEASURES	300x260 cm
CASE MEASURES	325x240 cm
WEIGHT	3500 kg
VOLTAGE	380V 60Hz
ELECTRICAL CONSUMPTION	5,44kw



ETIC SYSTEM
www.eticap.com


Cella Fredda 8000 - 15000 B/H

Cold glue labelling machines 8000 - 15000 B/H





The sturdy PF station takes the name of PF3 when it bears 3 labelling blades. It reaches a throughput of 11,000 pcs/h. A new type of labelling station called PFM was designed to apply wrap-around labels with throughputs up to 8,000 pcs/h and partial labels with throughputs of 15,000 pcs/h.

PFM 7T



TYPE	Cold glue
SPEED	7000 c/h
PLATES / HEADS	7
CONTAINER SELECTION	Screw conveyor
PLATES ROTATION	Oil bath cam
MAX. NUMBER OF STATIONS	2C+1A
SPEED GEARS	Inverter
SERIE'S EQUIPMENT	Preselection gate - Glue pump - Auto speed adj. - No bottle-no glue - Smoothing device - Too full sensor
SPACES IN STAR	3
PRIMITIVE DIAMETER	1120 mm
MAX. LABEL LENGHT	240 mm
MAX. LABEL HEIGHT	n.d.
CONTAINERS DIAMETER	50-120 mm
CONTAINER HEIGHT	380 mm
MACHINE MEASURES	300 x 260 cm
CASE MEASURES	325 x 240 cm
WEIGHT	3700 Kg
VOLTAGE	380V 60Hz
ELECTRICAL CONSUMPTION	4,84kw

PFM 14T

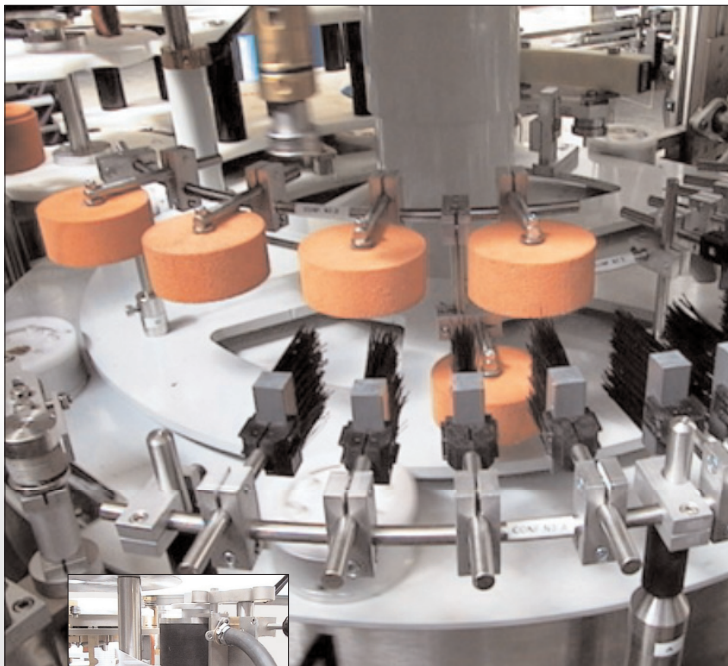

TYPE	Cold glue
SPEED	15000 c/h
PLATES / HEADS	14
CONTAINER SELECTION	Screw conveyor
PLATES ROTATION	Oil bath cam
MAX. NUMBER OF STATIONS	2C+1A
SPEED GEARS	Inverter
SERIE'S EQUIPMENT	Preselection gate - Glue pump - Auto speed adj. - No bottle-no glue - Smoothing device - Too full sensor
SPACES IN STAR	6
PRIMITIVE DIAMETER	1120 mm
MAX. LABEL LENGHT	120 mm
MAX. LABEL HEIGHT	n.d.
CONTAINERS DIAMETER	50-120 mm
CONTAINER HEIGHT	380 mm
MACHINE MEASURES	300 x 260 cm
CASE MEASURES	325 x 240 cm
WEIGHT	3900 Kg
VOLTAGE	380V 60Hz
ELECTRICAL CONSUMPTION	4,84kw



ETIC SYSTEM
www.eticap.com