


Sigillatrici e Monoblocchi



Sealers and monoblocks

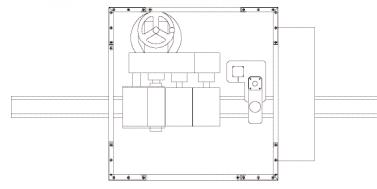

TYPE	Sealing machine
SPEED	1500 c/h
PLATES / HEADS	-
CONTAINER SELECTION	Screw conveyor
PLATES ROTATION	-
MAX. NUMBER OF STATIONS	1C
SPEED GEARS	Motovariat.
SERIE'S EQUIPMENT	-
SPACES IN STAR	5
PRIMITIVE DIAMETER	-
MAX. LABEL LENGTH	50 mm
MAX. LABEL HEIGHT	200 mm
CONTAINERS DIAMETER	50-120 mm
CONTAINER HEIGHT	380 mm
MACHINE MEASURES	250x155 cm
CASE MEASURES	275x180 cm
WEIGHT	n.d.
VOLTAGE	380V 60Hz
ELECTRICAL CONSUMPTION	0,49kw

KOLMAR 10/05

La gamma delle sigillatrici Eticap soddisfa le più disparate esigenze: molteplici modelli di sigillatrici lineari, rotative o monoblocchi di etichettatura e sigillatura, sono in grado di applicare su qualsiasi tipo di bottiglia o contenitore, sigilli di monopolio, sigilli di garanzia, di denominazione di origine e anticontraffazione. I sigilli possono essere applicati in forma di "I", "L" o "U", in verticale, orizzontale o diagonale. Le soluzioni di applicazione possibili sono: AUTOADESIVE, BIADESIVE, A COLLA CALDA O FREDDA. Le velocità vanno dai 1000 ai 24.000 pezzi/h.

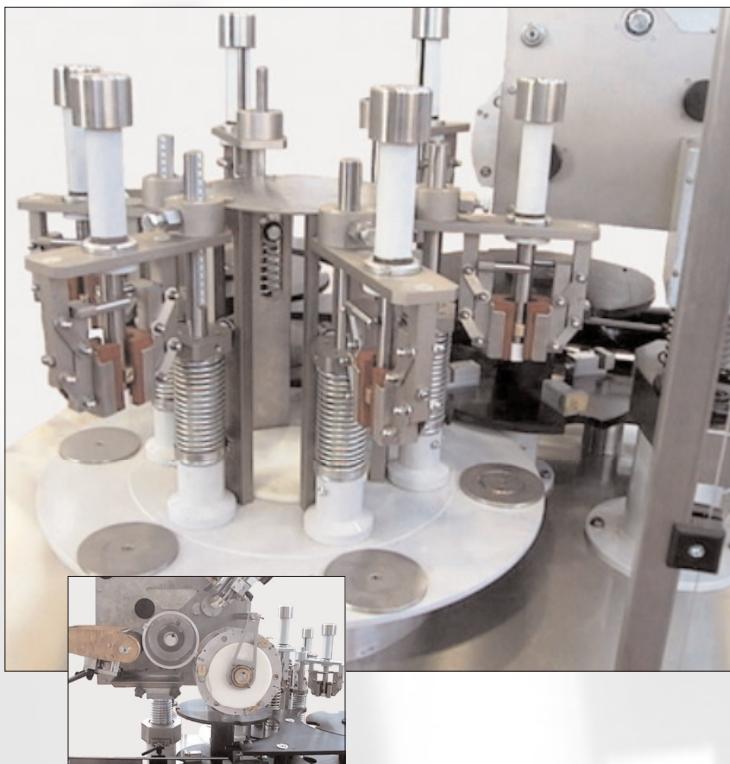


TYPE	Sealing machine
SPEED	6000 c/h
PLATES / HEADS	6
CONTAINER SELECTION	Screw conveyor
PLATES ROTATION	-
MAX. NUMBER OF STATIONS	1C
SPEED GEARS	Inverter
SERIE'S EQUIPMENT	Preselection gate -
Auto speed adj. - No bottle-no glue	
SPACES IN STAR	4
PRIMITIVE DIAMETER	600 mm
MAX. LABEL LENGTH	50 mm
MAX. LABEL HEIGHT	200 mm
CONTAINERS DIAMETER	50-120 mm
CONTAINER HEIGHT	380 mm
MACHINE MEASURES	300x154 cm
CASE MEASURES	325x180 cm
WEIGHT	1400 kg
VOLTAGE	380V 60Hz
ELECTRICAL CONSUMPTION	1,62kw

XR MO6P 8T

Sigillatrici e Monoblocchi

Sealers and monoblocks



TYPE	Monobloc.
SPEED	6000 c/h
PLATES / HEADS	6+8
CONTAINER SELECTION	Screw conveyor
PLATES ROTATION	Oil bath cam
MAX. NUMBER OF STATIONS	3C
SPEED GEARS	Inverter
SERIE'S EQUIPMENT	Preselection gate - Auto speed adj. - No bottle-no glue - Too ful sensor - Glue pump
SPACES IN STAR	3/3/2
PRIMITIVE DIAMETER	600/800 mm
MAX. LABEL LENGTH	50/180 mm
MAX. LABEL HEIGHT	200/n.d. mm
CONTAINERS DIAMETER	50-120 mm
CONTAINER HEIGHT	380 mm
MACHINE MEASURES	350x230 cm
CASE MEASURES	375x240 cm
WEIGHT	3800 kg
VOLTAGE	380V 60Hz
ELECTRICAL CONSUMPTION	4,92kw

The range of Eticap sealers meets the most different needs: A number of in-line, rotary or monoblock labelling and sealing models can apply tax, guarantee, denomination of origin and pilfer proof seals on bottles or containers of any type. The seals can be applied in "I", "L" or "U" shapes, in vertical, horizontal o diagonal. The possible labelling methods are ADHESIVE, BI-ADHESIVE, HOT MELT OR COLD GLUE SYSTEMS. The speed range can vary from 1,000 to 24,000 pcs/h.

ARS

