

ETIBLOC 4000

MONOBLOCCO 4000 B/H



The Monobloc allows the packaging of bottle for wine or oil, round and square, with the use of one complete machine with a speed of 4.000 bph.

A complete packaging, from PVC or polyrolled / aluminium capsules dispenser, to its closing, until the labelling device, all in a reduced space.

Caps dispenser complete of presence stoppers device and long autonomy warehouse and change heads by means of spin on central shaft.

It is possible to install until three adhesive stations for the application of body label, back label and shoulder label, or, in alternative, the wraparound D.O.C.G. with bi-adhesive system device.




Il Monoblocco consente di confezionare la bottiglia di vino e di olio, tonda e quadra, con l'impiego di un solo macchinario a velocità fino a 4.000 bph.

Un confezionamento completo, dalla distribuzione della capsula in PVC o polilaminato/alluminio, alla sua chiusura, fino all'etichettatura, il tutto in uno spazio ridotto.

Il distributore di capsule è completo di dispositivo presenza tappi e di magazzino a lunga autonomia ed il cambio delle testate avviene mediante rotazione su albero centrale.

E' possibile installare fino a tre stazioni adesive per l'applicazione di etichetta di corpo, controetichetta e lunetta o, in alternativa, la fascetta D.O.C.G. con il sistema biadesivo.

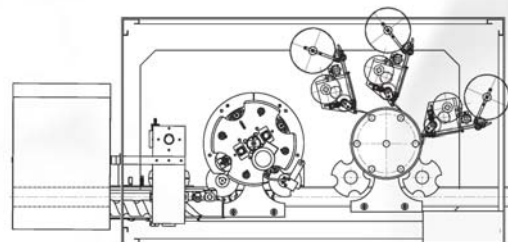


TYPE	Monobloc
SPEED MAX.	3.500 c/h with rolling heads and 4.000 b/h with thermal heads
COMPOSITION	- First carousel, for capsules, with four (4) rolling heads and four (4) thermal heads - Second carousel, for labels application, with six plates
CONTAINERS SELECTION	Screw conveyer
PLATES ROTATION	Maltese crosses
SPEED GEARS	Inverter
MAX. CAPSULES DIMENSIONS	height 65 mm - hole 35 mm
MAX. LABEL LENGTH	135 mm
MAX. LABEL HEIGHT	200 mm
CONTAINERS DIAMETER	50-120 mm
CONTAINER HEIGHT	380 mm
MACHINE MEASURES	313x123 cm
WEIGHT	1800 Kg
VOLTAGE	380V 60Hz
ELECTRICAL CONSUMPTION	7kW for Thermal heads & 4kW for Rolling heads

Autoadhesive 600 - 2000 B/H

Adhesive labelling machines 600 - 2000 B/H

LE1 07

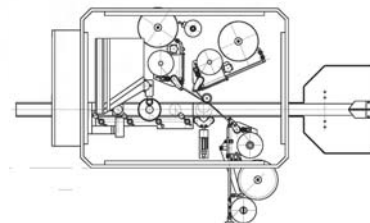


TYPE	Selfadhesive
SPEED	2500 c/h
PLATES / HEADS	-
CONTAINER SELECTION	Gate
PLATES ROTATION	-
MAX. NUMBER OF STATIONS	3
SPEED ADJUSTMENT	PLC
SERIE'S EQUIPMENT	-
SPACES IN STAR	-
PRIMITIVE DIAMETER	-
MAX. LABEL LENGTH	300 mm
MAX. LABEL HEIGHT	150 mm
CONTAINERS DIAMETER	50-140 mm
CONTAINER HEIGHT	380 mm
MACHINE MEASURES	250X98 cm
CASE MEASURES	275x125 cm
WEIGHT	800 kg
VOLTAGE	380V 60Hz
ELECTRICAL CONSUMPTION	2,29kw

La serie economica dei sistemi Eticap, è costruita secondo gli stessi criteri di affidabilità ed efficienza di quelle di fascia più alta. Le gamme sono 3. I modelli LE, a struttura lineare; la serie AR FACILE, rotativa a 3 testine ed infine l'ETIBLOC, creato per i piccoli produttori di vino o olio.

The economical series of the Eticap labelling systems is manufactured with the same guidelines of liability and efficiency characterizing the high standard products.

The series consists of 3 ranges: LE Models, in-line equipments, series AR FACILE, 3-head rotary machines and ETIBLOC.

AR F

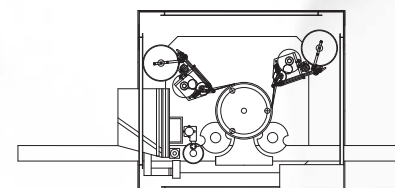

TYPE	Selfadhesive
SPEED	2000 c/h
PLATES / HEADS	3
CONTAINER SELECTION	Gate
PLATES ROTATION	Maltese crosses
MAX. NUMBER OF STATIONS	3
SPEED GEARS	Motovariat.
SERIE'S EQUIPMENT	-
SPACES IN STAR	2
PRIMITIVE DIAMETER	360 mm
MAX. LABEL LENGTH	325 mm
MAX. LABEL HEIGHT	150 mm
CONTAINERS DIAMETER	50-120 mm
CONTAINER HEIGHT	380 mm
MACHINE MEASURES	250x144 cm
CASE MEASURES	275x170 cm
WEIGHT	1100 kg
VOLTAGE	380V 60Hz
ELECTRICAL CONSUMPTION	2,29kw