


Autoadhesive Rotative 6000 - 24000 B/H

Adhesive system rotary labelling machines 6000 - 24000 B/H




Oltre i 6000 pezzi/h la gamma AR diventa PLUS. Totalmente nuova la concezione di questa stazione autoadesiva che è in grado di erogare 110 mt/min di etichette con accelerazioni brevissime e massima silenziosità. In altre parole: velocità e precisione. I modelli standard a disposizione sono più di 10 e raggiungono i 36.000 pezzi/h. Questi sistemi di grandi prestazioni prevedono l'inclusione di molte parti normalmente opzionali, quali: piatti porta bobine maggiorati, sicurezze per rottura carta, memorizzazione di 50 formati di etichette, sincronizzazione velocità macchina/velocità etichette e molto altro ancora.

AR 10T



TYPE	Selfadhesive
SPEED	8500 c/h
PLATES / HEADS	10
CONTAINER SELECTION	Screw conveyor
PLATES ROTATION	Oil bath cam
MAX. NUMBER OF STATIONS	3
SPEED GEARS	Inverter
SERIE'S EQUIPMENT	Cut paper sensor - Label plate 400mm - Setup display - Label synchronizat. - Preselection gate - Too full sensor - End label alarm - Production counter
SPACES IN STAR	4
PRIMITIVE DIAMETER	600 mm
MAX. LABEL LENGHT	135 mm
MAX. LABEL HEIGHT	200 mm
CONTAINERS DIAMETER	50-120 mm
CONTAINER HEIGHT	380 mm
MACHINE MEASURES	300x175 cm
CASE MEASURES	325x200 cm
WEIGHT	1800 kg
VOLTAGE	380V 60Hz
ELECTRICAL CONSUMPTION	3,42kw

AR MO 8T

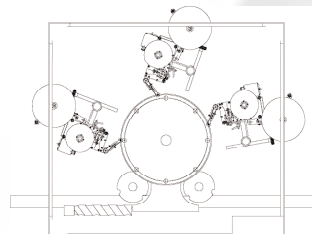

TYPE	Selfadhesive
SPEED	7000 c/h
PLATES / HEADS	8
CONTAINER SELECTION	Screw conveyor
PLATES ROTATION	Oil bath cam
MAX. NUMBER OF STATIONS	4
SPEED GEARS	Inverter
SERIE'S EQUIPMENT	Cut paper sensor - Label plate 400mm - Setup display - Label synchronizat. - Preselection gate - Too full sensor
SPACES IN STAR	3
PRIMITIVE DIAMETER	800 mm
MAX. LABEL LENGHT	260 mm
MAX. LABEL HEIGHT	200 mm
CONTAINERS DIAMETER	50-120 mm
CONTAINER HEIGHT	380 mm
MACHINE MEASURES	300x235 cm
CASE MEASURES	325x240 cm
WEIGHT	2600 kg
VOLTAGE	380V 60Hz
ELECTRICAL CONSUMPTION	4,81kw



ETIC SYSTEM
www.eticap.com

Autoadhesive Rotative 6000 - 24000 B/H


Adhesive system rotary labelling machines 6000 - 24000 B/H



Over 6000 pcs/h the AR range switches to PLUS. This station for adhesive labelling with brand new design can release 110 mt/min labels with very short accelerations and very low noisiness. In other words: speed and precision.

We have over 10 standard models available; they can attain a throughput of 36,000 pcs/h. These high performance systems require the insertion of many parts that normally are options, such as: roller holding plates of bigger dimensions, safety devices signalling any tear of the paper; memorization of 50 label formats, synchronization of the machine/label speeds and many other devices.




AR 28T

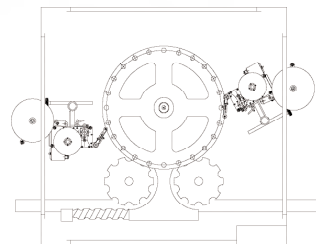

TYPE	Selfadhesive
SPEED	24000 c/h
PLATES / HEADS	28
CONTAINER SELECTION	Screw conveyor
PLATES ROTATION	Oil bath cam
MAX. NUMBER OF STATIONS	5
SPEED GEARS	Inverter
SERIE'S EQUIPMENT	Cut paper sensor - Label plate 500mm - Setup display - Label synchronizat. - Preselection gate - Too full sensor - End label alarm - Production counter
SPACES IN STAR	12
PRIMITIVE DIAMETER	1120 mm
MAX. LABEL LENGHT	100 mm
MAX. LABEL HEIGHT	200 mm
CONTAINERS DIAMETER	50-120 mm
CONTAINER HEIGHT	380 mm
MACHINE MEASURES	300 x 260 cm
CASE MEASURES	325 x 240 cm
WEIGHT	4100 kg
VOLTAGE	380V 60Hz
ELECTRICAL CONSUMPTION	5,50 Kw

KOLMAR 1005

Stazione AR PLUS

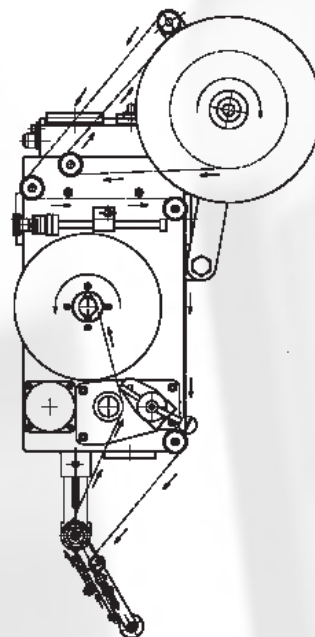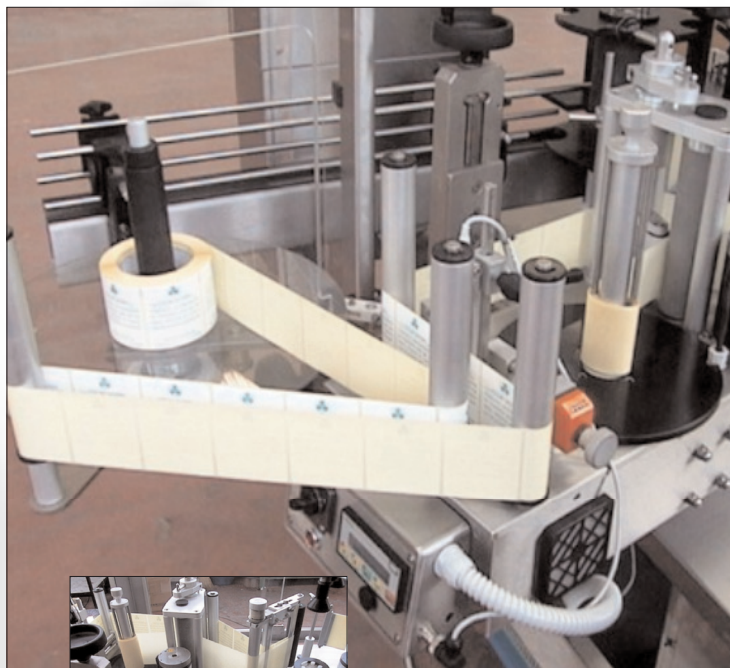

ETIC SYSTEM
www.eticap.com